


Technical Data Sheet

NESSOL Heptane

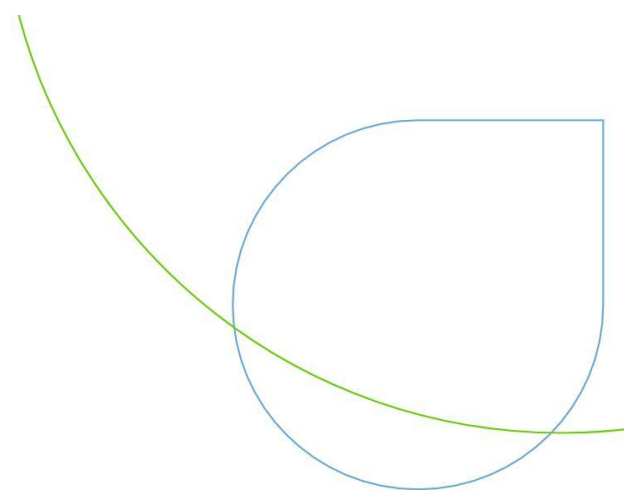

1/1/2020

Properties	Unit	Specification		Test Method*
		min	max	
Aromatic content	% v/v	-	0.05	NM124
Benzene content	mg/l	-	0.01	NM 124
Distillation, initial boiling point	°C	87	-	EN ISO 3405
Distillation, dry point	°C	-	110	EN ISO 3405
Sulphur content	mg/kg	-	3.0	EN ISO 20846
Copper strip corrosion		-	1b	EN ISO 2160
Doctor test		-	Negat.	ASTM D 4952
Evaporation residue	mg/100 ml	-	1	ASTM D 1353
n-hexane	%-wt	-	4.5	ASTM D 6045
Colour, Saybolt		+30	-	ASTM D 6045
Appearance		Clear and Bright		D 4176-1

The Solvent Emission Directive (EU Directive 1999/13/EC) limits emissions of Volatile Organic Compounds (VOCs). This directive defines a VOC as any organic compound having a vapour pressure of 0.01 kPa or more at + 293.15 K (+ 20 °C). Vapour pressure of Nessel Heptane at + 20 °C is > 0.01 kPa, measured.

The product will comply with the specification according to the procedures described in ISO 4259.

Concerning safe use of the products, we refer to the Safety Data Sheets and User's Guides published by Neste Oyj.

INQUIRIES
Neste Retail
POB 95
FIN-00095 Neste Oyj, Finland

Telephone +358 20 80100